
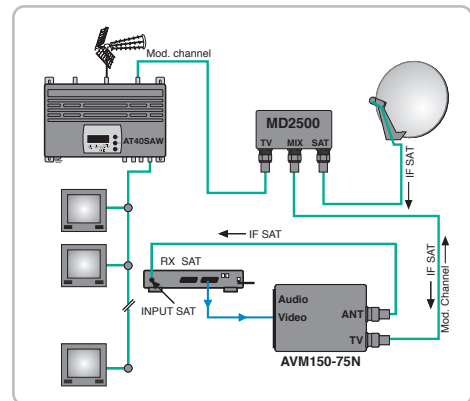
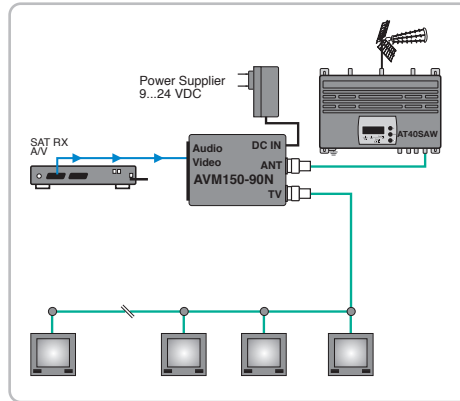


AVM150 SERIES

- ▶ Input A/V Scart
- ▶ PLL frequency synthesis
- ▶ audio / video adjustable inputs
- ▶ Spurious suppressor filter
- ▶ TV terrestrial / Sat self- mixing
- ▶ Multistandard PAL-SECAM B/G I D/K L/L'



ITEM	AVM150-75N	AVM150-75R	AVM150-90N	AVM150-90R
OUTPUT LEVEL	70 ±2 dBµV		90 ±2 dBµV	
GAIN ADJUSTER	-		0/-20 dB	
INPUT/OUTPUT FREQUENCY RANGE	5...2200 MHz			
THROUGH LOSS MIX	≤ 3 dB 5...2200 MHz		≤ 2 dB 5...2200 MHz	
SPURIOUS IN THE CHANNEL			- 65 dB	
SPURIOUS IN THE BAND			- 50 dB	
AUDIO / VIDEO CONNECTOR TYPE	SCART	RCA	SCART	RCA
VIDEO INPUT LEVEL (ADJUSTABLE)	0,5...1,5 Vpp			
S/N RATIO	50 dB			
VIDEO INPUT IMPEDANCE	75 Ohm			
MODULATION DEPTH	78 %			
VIDEO MODULATION	AM			
AUDIO INPUT LEVEL (ADJUSTABLE)	0,15...3 Vpp		0,15...3Vpp	
PREENPHASIS	50 µS			
AUDIO FREQUENCY RANGE	40...15.000 Hz			
AUDIO DISTORTION	≤ 0,5%			
MAINS VOLTAGE	9...24VDC			
CONSUMPTION MAX.	60 mA		90 mA	
DIMENSIONS	96x58x27mm		96x58x27 mm	
STANDARDS	PAL B/G-I-D/K SECAM L/L'			