

AL20B


Switching Power Adapter 20 Volt / 45 W

- ▶ Very Low Ripple & Noise
- ▶ Short circuit protection
- ▶ Over voltage protection
- ▶ Over current protection
- ▶ Status LED
- ▶ Soft-start power-on



High Power Low Noise AC/DC adapter for correct powering of all dCSS multiswitch SCW and SCX series.

Wall fastening system

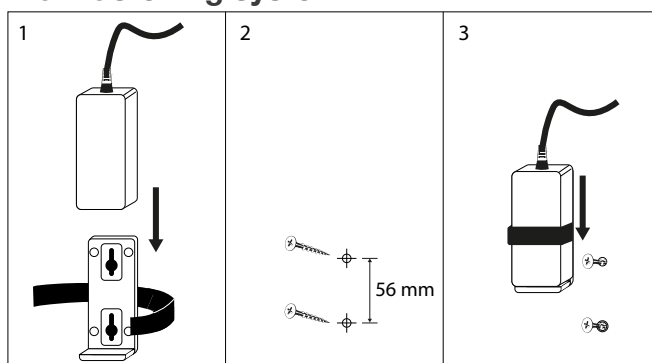

TECHNICAL SPECIFICATIONS

INPUT	100... 240 VAC 50/60 Hz
INPUT CURRENT	1,5 A MAX.
OUTPUT VOLTAGE	20 VCC ±3%
OUTPUT POWER	45 W
MAX OUTPUT CURRENT	2,25 A
NO-LOAD POWER CONSUMPTION	0,15W @ 230V
EFFICIENCY	88% @ 230V
OUTPUT RIPPLE	≤ 50mVp-p
OPERATING TEMPERATURE RANGE	-20... +50 C°
AC INPUT INLET	IEC 320-C8
AC INPUT POWER CORD	1.200 mm EURO PLUG - IEC 320-C8
DC OUTPUT POWER CORD	1.200 mm ANGLE PLUG 2,1 X 9,5 mm
DIMENSIONS	116 X 52 X 33 mm