
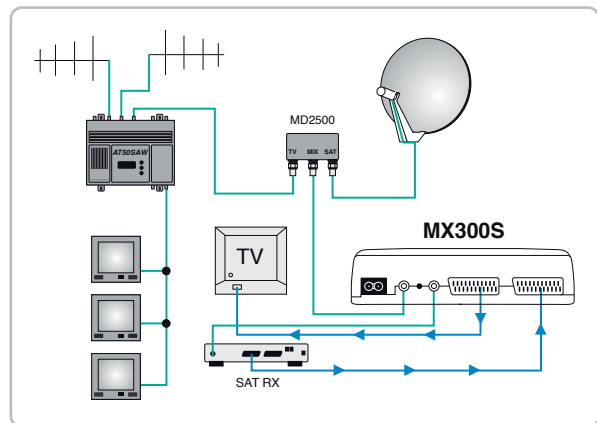


# MX300S

- ▶ PLL frequency synthesis
- ▶ Double scart connector
- ▶ Automatic audio control
- ▶ Adjustable output level 90 dB $\mu$ V (0/-25 dB)
- ▶ Output level attenuator 0/-20 dB
- ▶ Audio stereo Hi-Fi
- ▶ Self-powered
- ▶ Multistandard PAL-SECAM B/G I D/K L/L'

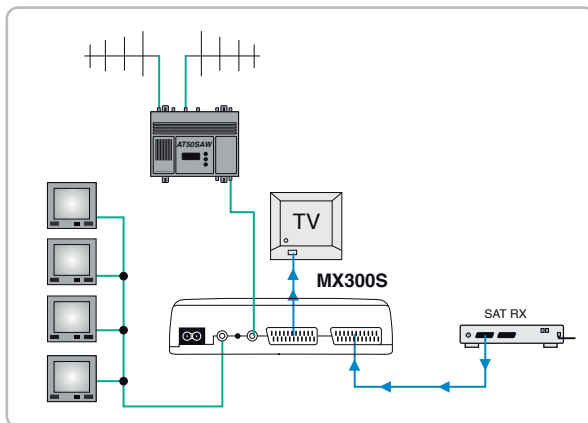

ITEM	MX300S
OUTPUT LEVEL	85... 90 dB $\mu$ V
OUTPUT LEVEL ADJUSTER	0 /- 20 dB
INPUT/OUTPUT FREQUENCY RANGE	5...2200 MHz
THROUGH LOSS MIX	< 3 dB 5...2200 MHz
SPURIOUS IN THE CHANNEL	- 65 dB
SPURIOUS IN THE BAND	- 50 dB
AUDIO / VIDEO CONNECTOR TYPE	Scart / Scart
VIDEO INPUT LEVEL (ADJUSTABLE)	0,5...1,5 Vpp
S/N RATIO VIDEO INPUT IMPEDANCE	75 Ohm
MODULATION DEPTH	78 %
VIDEO MODULATION	AM
AUDIO STEREO CARRIERS PAL B/G	5,5 MHz + 5,74218 MHz
AUDIO INPUT LEVEL (ADJUSTABLE)	0,5... 2,0 Vpp
PREENPHASIS	50 $\mu$ S
AUDIO FREQUENCY RANGE	40...15.000
AUDIO DISTORTION	$\leq$ 0,5 % Hz
MAINS VOLTAGE	230 VAC
CONSUMPTION MAX.	2,0 VA
DIMENSIONS	202 x 95 x 47 mm
STANDARDS	PAL B/G-I-D/K SECAM L/L'

BAND	STANDARD PAL B/G
I°-IF	38,9 MHz
VHF	E2...E12
CATV	S2...S10 / S11...S20
HYPER	S21...S38
UHF	21...70

BAND	STANDARD PAL I
I°-IF	38,9 MHz
VHF	A...J / 04...13
UHF	21...70

BAND	STANDARD PAL D/K
I°-IF	38,9 MHz
VHF	RI...RIV / RIV...RXII
Special	S9...S38
UHF	21...70

BAND	STANDARD SECAM L/L'
I°-IF	38,9 MHz
VHF	2...4 / 5...10
UHF	21...70